


3300 Series Ether-Based Polyurethane-Lined Clear PVC Tubing

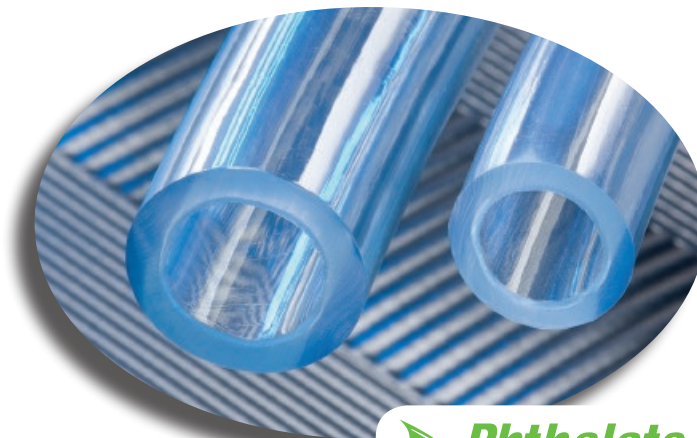

Special clear flexible tubing combining a food grade PVC outer surface with an inner liner of NSF-61 listed polyurethane.

Construction:

73±3 Shore "A" Clear FDA⁽⁰³⁾ PVC, lined with an 80 Shore "A" clear Ether-Based Polyurethane which is in compliance with NSF⁽⁰⁹⁾ and RoHS⁽¹⁶⁾ requirements.

Features:

- NSF-61 listed polyurethane liner inside a 73±3 Shore "A" PVC outer layer.
- Non-PVC contact surface.
- The polyurethane liner offers improved oil resistance compared to PVC.
- Phthalate Free!

Applications:

- Applications in which a flexible tube with NSF-61 contact material is desired.
- Lower cost alternative to urethane tubing.
- Sight glass tubing.
- Low pressure oil transfer.

Service Temperature Range: +25°F (-4°C) to +140°F (+60°C)

Nominal Specifications

Series No.	Size Code	Nominal ID		Nominal OD		Nominal Wall		Working Pressure† (PSI) @70°F (20°C)	Standard Length Ctn/Coils	Approx. Wt. per Pkg.
		(In)	(mm)	(In)	(mm)	(In)	(mm)			
3300	0406	1/4	6.4	3/8	9.5	1/16	1.6	40	100 ft.	3.2 lbs.
3300	0507	5/16	7.9	7/16	11.1	1/16	1.6	50	100 ft.	4.0 lbs.
3300	0609	3/8	9.5	9/16	14.3	3/32	2.4	25	100 ft.	7.2 lbs.

† Note: Working Pressure decreases as temperature increases. Pressure ratings can only be obtained with proper coupling procedures.

NOTE: For details of the following compliances mentioned above, refer to footnotes listed on page 63.

FDA⁽⁰³⁾, NSF⁽⁰⁹⁾, PHTHALATE FREE⁽¹⁵⁾, RoHS⁽¹⁶⁾

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS OR DISCONTINUE PRODUCTS WITHOUT PRIOR NOTICE.

Distributed By: 151 Memorial Drive, Unit H
Shrewsbury, MA 01545
Tel 888.792.2223
sales@plastixs.com

plastixs®
manufacturing solutions

KKTCA0617