

Hot Water


ALFAGOMMA®

plastiXs®
manufacturing solutions

T350LL / T350LH **225 PSI Premium Paper** **Mill/Creamery Wash Down** **Hose – No Nozzle**

3-A
COMPLIANT MATERIAL

T350LL
White
Cover
T350LH
Red
Cover

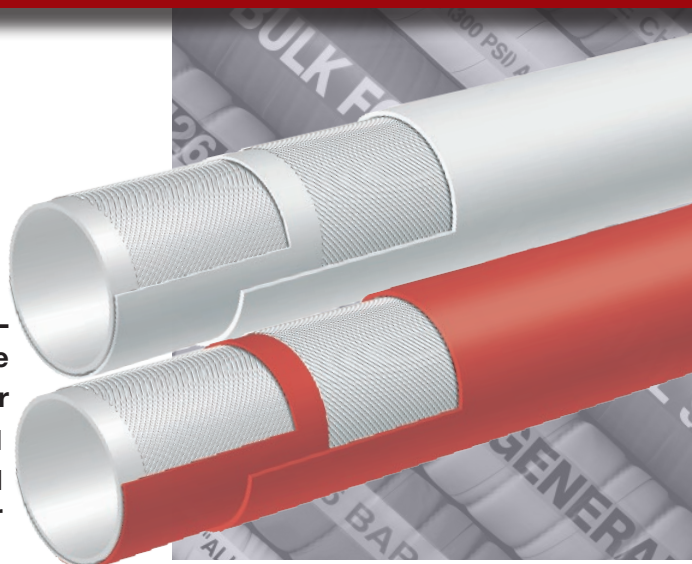

Applications:

For general wash down service, using hot water or low pressure saturated steam in processing plants and facilities and in food and dairy plants.

Cover:

Red EPDM – heat, abrasion and ozone resistant.
White EPDM – heat, abrasion and ozone resistant.

Reinforcement:

High tensile textile cords.

Tube:

White EPDM. Meets FDA and 3A (18-03) requirements.

Working Pressure:

Constant Pressure – 15 Bar (225 PSI)

Steam Pressure:

Constant Pressure – 6 Bar (90 PSI)

Temperature Range:

Water -40°F (-40°C) to 248°F (+120°C)

Steam 330°F to (+165°C)

Branding:

ALFAGOMMA – ITALY – T350 6 BAR (90 PSI) STEAM
15 BAR (225 PSI) HOT WATER (embossed)

Standard Length:

200 feet – eliminates bulky hookups

*T350 fully complies with the requirements listed in FDA CFR21.

Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Max Rec. WP (PSI)	Weight (lbs./ft.)
T350LL050	1/2	13	0.91	23	225	0.27
T350LL062	5/8	16	1.02	26	225	0.31
T350LL075	3/4	19	1.22	31	225	0.44
T350LL100	1	25	1.46	37	225	0.54
T350LL125	1 1/4	32	1.81	46	225	0.63
T350LL150	1 1/2	38	2.05	52	225	0.74
T350LL200	2	51	2.64	67	225	1.12
T350LH075	3/4	19	1.22	31	225	0.44
T350LH100	1	25	1.46	37	225	0.54

COUPLING SUGGESTIONS

Short shank, long shank couplings (NPT, GHT), barbed inserts attached with bands.

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS OR DISCONTINUE PRODUCTS WITHOUT PRIOR NOTICE.