

Hot Water



T352AA 75 PSI Radiator Hose



Applications:

Radiator hose.

Cover:

Black EPDM – heat, abrasion and ozone resistant.

Reinforcement:

High tensile textile cords.

Tube:

Black EPDM.

Working Pressure:

5 Bar (75 PSI)

Temperature Range:

-40°F (-40°C) to 248°F (+120°C)

Branding:

ALFAGOMMA – ITALY – T-352 RADIATOR – DIN 73411 – dia mm / in. SAE 20R1-D2 (in yellow letters)


Standard Length:

12 1/2 foot and 200 foot coils for 1/2" to 2" ID sizes,
12 1/2 foot coils for 2 3/16" to 5" sizes

Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Max Rec. WP (PSI)	Available Length	Weight (lbs./ft.)
T352AA050X12.6	1/2	13	0.83	21	75	12'6" Coil	0.19
T352AA050X200	1/2	13	0.83	21	75	200' Coil	0.19
T352AA062X12.6	5/8	16	0.94	24	75	12'6" Coil	0.22
T352AA071X12.6	11/16	18	1.02	26	75	12'6" Coil	0.24
T352AA078X12.6	13/16	20	1.10	28	75	12'6" Coil	0.26
T352AA087X12.6	7/8	22	1.18	30	75	12'6" Coil	0.28
T352AA087X200	7/8	22	1.18	30	75	200' Coil	0.28
T352AA100X12.6	1	25	1.30	33	75	12'6" Coil	0.32
T352AA100X200	1	25	1.30	33	75	200' Coil	0.32
T352AA112X12.6	1 1/8	28	1.42	36	75	12'6" Coil	0.34
T352AA112X200	1 1/8	28	1.42	36	75	200' Coil	0.34
T352AA118X12.6	1 3/16	30	1.50	38	75	12'6" Coil	0.37

continued

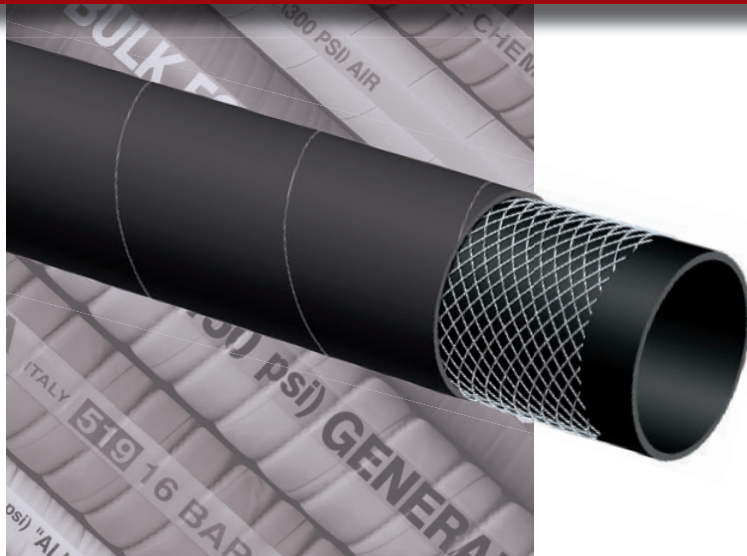

plastiXs[®]
manufacturing solutions

T352AA 75 PSI Radiator Hose

Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Max Rec. WP (PSI)	Available Length	Weight (lbs./ft.)
T352AA125X12.6	1 1/4	32	1.57	40	75	12'6" Coil	0.39
T352AA125X200	1 1/4	32	1.57	40	75	200' Coil	0.39
T352AA137X12.6	1 3/8	35	1.69	43	75	12'6" Coil	0.42
T352AA150X12.6	1 1/2	38	1.89	48	75	12'6" Coil	0.57
T352AA150X200	1 1/2	38	1.89	48	75	200' Coil	0.57
T352AA157X12.6	1 9/16	40	1.97	50	75	12'6" Coil	0.60
T352AA157X200	1 9/16	40	1.97	50	75	200' Coil	0.60
T352AA162X12.6	1 5/8	42	2.05	52	75	12'6" Coil	0.63
T352AA162X200	1 5/8	42	2.05	52	75	200' Coil	0.63
T352AA175X12.6	1 3/4	45	2.17	55	75	12'6" Coil	0.66
T352AA175X200	1 3/4	45	2.17	55	75	200' Coil	0.66
T352AA189X12.6	1 7/8	48	2.28	58	75	12'6" Coil	0.70
T352AA189X200	1 7/8	48	2.28	58	75	200' Coil	0.70
T352AA200X12.6	2	51	2.40	61	75	12'6" Coil	0.75
T352AA200X200	2	51	2.40	61	75	200' Coil	0.75
T352AA218X12.6	2 3/16	55	2.56	65	75	12'6" Coil	0.80
T352AA225X12.6	2 1/4	57	2.64	67	75	12'6" Coil	0.82
T352AA238X12.6	2 3/8	60	2.76	70	75	12'6" Coil	0.86
T352AA250X12.6	2 1/2	63	2.87	73	75	12'6" Coil	0.90
T352AA275X12.6	2 3/4	70	3.15	80	75	12'6" Coil	0.97
T352AA300X12.6	3	76	3.39	86	75	12'6" Coil	1.04
T352AA315X12.6	3 1/8	80	3.54	90	75	12'6" Coil	1.10
T352AA354X12.6	3 9/16	90	4.02	102	75	12'6" Coil	1.36
T352AA400X12.6	4	102	4.49	114	75	12'6" Coil	1.52
T352AA450X12.6	4 1/2	116	5.00	127	75	12'6" Coil	1.69
T352AA500X12.6	5	127	5.55	141	75	12'6" Coil	2.16