

plastiXs[®]
manufacturing solutions

T600AA

Hard Wall Marine Exhaust Hose USCG/SAE J1527 A2/B2



Applications:

Fuel, oil and hydraulic fluids suction and discharge. Suitable for exhaust gas from water cooled stationary or marine diesel engines. Offers maximum flexibility.

Cover:

Black NBR/PVC blend – abrasion, ozone, hydrocarbon and fire resistant.

Reinforcement:

High tensile textile cords with flexible steel helix wire.

Tube:

Black NBR – exhaust gas, fuel and fire resistant.

Working Pressure:

Constant Pressure – 2 Bar (30 PSI)

Temperature Range:

-4°F (-20°C) to 212°F (+100°C)

Branding:

ALFAGOMMA – ITALY T600 MARINE EXHAUST/FUEL S & D – <SIZE> – USCG/SAE J1527 TYPE A2 (in red letters)

Standard Length:


25 or 50 feet

Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Max Rec. WP (PSI)	Vacuum HG (in.)	Min. Bending Radius (in. @ 68°F)	Weight (lbs./ft.)
T600AA062	5/8	16	1.02	26	30	30	2	0.36
T600AA075	3/4	19	1.14	29	30	30	2 1/4	0.44
T600AA087	7/8	22	1.26	32	30	30	2 3/4	0.50
T600AA100	1	25	1.38	35	30	30	3	0.56
T600AA112	1 1/8	28	1.50	38	30	30	3 1/4	0.60
T600AA125	1 1/4	32	1.65	42	30	30	3 3/4	0.65
T600AA137	1 3/8	35	1.77	45	30	30	4 1/4	0.70
T600AA150	1 1/2	38	1.89	48	30	30	4 1/2	0.76
T600AA162	1 5/8	42	2.17	52	30	30	5	0.81
T600AA175	1 3/4	45	2.16	55	30	30	5 1/4	0.87
T600AA189	1 7/8	48	2.28	58	30	30	5 3/4	0.91
T600AA200	2	51	2.40	61	30	30	6	0.99
T600AA225	2 1/4	57	2.64	67	30	30	6 3/4	1.09
T600AA238	2 3/8	60	2.76	70	30	27	7	1.25
T600AA250	2 1/2	63	2.87	73	30	27	7 1/2	1.31

continued

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS OR DISCONTINUE PRODUCTS WITHOUT PRIOR NOTICE.

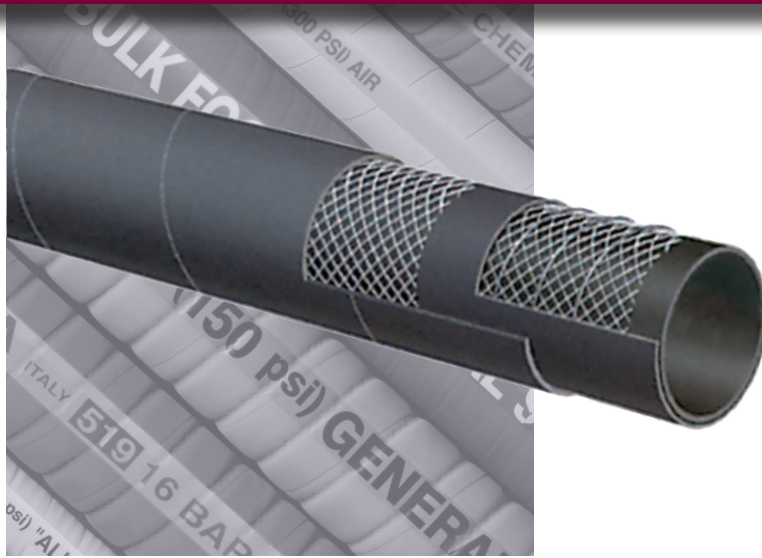

plastiXs®
manufacturing solutions

T600AA (continued)
Hard Wall Marine Exhaust Hose
USCG/SAE J1527 A2/B2

Nominal Specifications								
Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Max Rec. WP (PSI)	Vacuum HG (in.)	Min. Bending Radius (in. @ 68°F)	Weight (lbs./ft.)
T600AA275	2 3/4	70	3.11	80	30	27	8 1/4	1.41
T600AA300	3	76	3.39	86	30	27	9	1.53
T600AA350	3 1/2	90	3.94	100	30	27	10 1/2	1.91
T600AA400	4	102	4.41	112	30	27	12	2.12
T600AA450	4 1/2	115	5.00	127	30	27	13 1/2	2.72
T600AA500	5	127	5.55	141	30	24	15	3.04

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS OR DISCONTINUE PRODUCTS WITHOUT PRIOR NOTICE.