




## **T606AE** **150 PSI Corrugated** **Petroleum S & D –** **Arctic Hose**

**CORRUGATED**

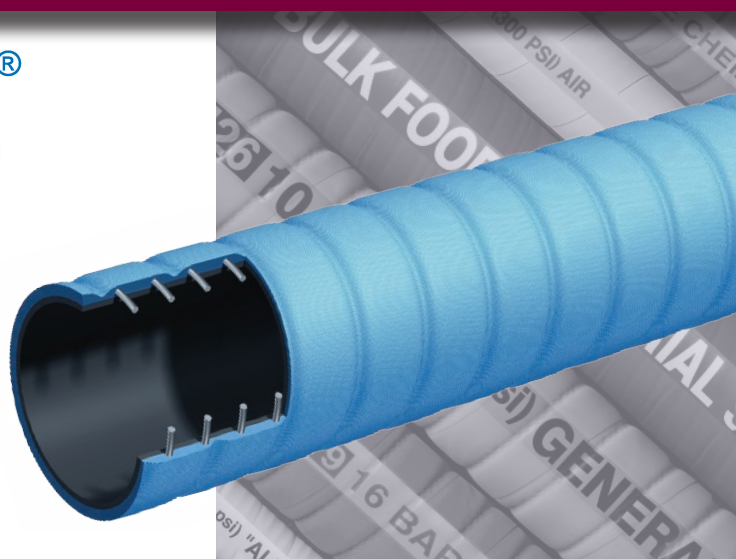

### **Applications:**

For suction and discharge applications in truck and tank car transfer of gasoline, oil and other petroleum-based products with up to 50% aromatic content. Where extreme flexibility is needed in low temperature.

### **Cover:**

Blue corrugated – abrasion, ozone and hydrocarbon resistant.

### **Reinforcement:**

High tensile textile cords with flexible steel helix wire.

### **Tube:**

Black conductive NBR.

### **Working Pressure:**

Constant Pressure – 150 PSI

### **Temperature Range:**

-65°F (-54°C) to 180°F (+82°C)

### **Branding:**

ALFAGOMMA – ITALY T606 – 10 BAR (150 PSI)

PETROLEUM – S & D Arctic (in blue letters on yellow layline)

### **Standard Length:**

100 feet

### **Nominal Specifications**

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Max Rec. WP (PSI)	Vacuum HG (in.)	Min. Bending Radius (in. @ 68°F)	Weight (lbs./ft.)
T606AE200	2	51	2.48	63	150	30	3	1.06
T606AE300	3	76	3.54	90	150	30	4 1/2	1.84
T606AE400	4	102	4.57	116	150	30	6	2.67

### **COUPLING SUGGESTIONS**

Quick-Acting, combination nipples attached with bands or internally expanded brass couplings with gasket seal attached with ferrules.

★ Kuriyama offers a full line of Quick-Acting couplings, pin lug shank couplings and combination nipples. Refer to current Kuriyama-Couplings™ and Accessories Catalog for type and pricing.

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS OR DISCONTINUE PRODUCTS WITHOUT PRIOR NOTICE.