


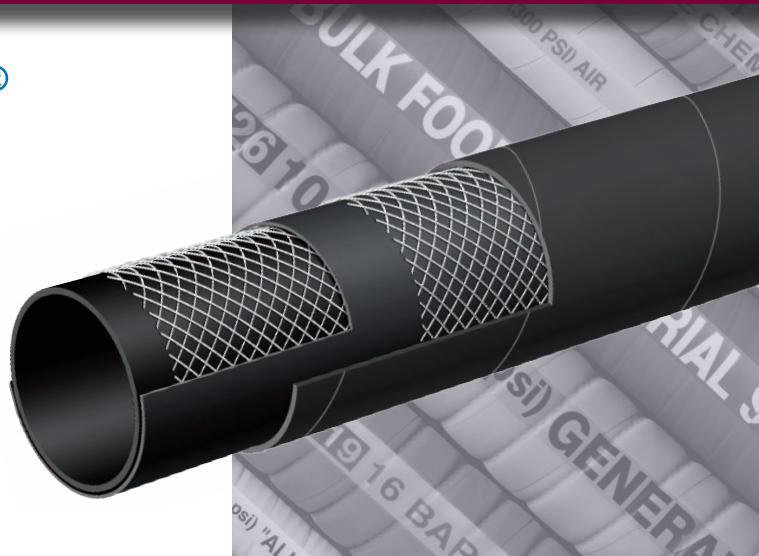

## T6D1AA 400 PSI Oil Rigger / Frack Discharge Hose

**Applications:**

Fracking fluids, liquid mud and crude oil delivery in oil field and gas exploration.

**Cover:**

Black synthetic elastomer – abrasion, oil and ozone resistant.

**Reinforcement:**

High tensile textile cords.

**Tube:**

Black synthetic elastomer.

**Working Pressure:**

Constant Pressure – 27 Bar (400 PSI)

**Temperature Range:**

-22°F (-30°C) to 176°F (+80°C)

**Branding:**

ALFAGOMMA – ITALY OIL RIGGER – FRACK 27 BAR (400 PSI) (in blue letters)

**Standard Length:**

100 feet

### Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Max Rec. WP (PSI)	Weight (lbs./ft.)
T6D1AA400	4	102	4.72	120	400	2.89

**COUPLING SUGGESTIONS**

★ Kuriyama offers a full line of Quick-Acting couplings, pin lug shank couplings and combination nipples. Refer to current Kuriyama-Couplings™ and Accessories Catalog for type and pricing.

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS OR DISCONTINUE PRODUCTS WITHOUT PRIOR NOTICE.