


# Material Handling



## T720AA Bulk Material S & D Hose

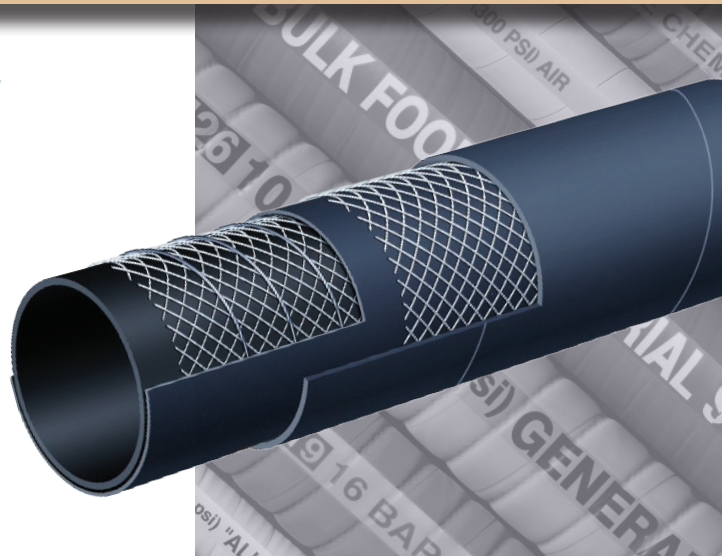

### Applications:

Suction and discharge of wet or dry abrasive materials. Designed for grains and dry cement.

### Cover:

Black conductive SBR/NR blend – abrasion and ozone resistant.

### Reinforcement:

Spiraled high tensile textile cords with flexible steel helix wire.

### Tube:

3/16" black conductive NR – abrasion resistant.

### Working Pressure:

Constant Pressure –  
10 Bar (150 PSI) for 2", 3", 4"  
5 Bar (75 PSI) for 5", 6", 8"

### Temperature Range:

-22°F (-30°C) to 176°F (+80°C)

### Branding:

ALFAGOMMA – ITALY T720 – BULK MATERIAL – S & D  
(in white letters)

### Standard Length:

100 feet: 2" through 4"  
20 feet: 5", 6" and 8"  
50 feet: 4", 5" and 6"

### Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Max Rec. WP (PSI)	Vacuum HG (in.)	Min. Bending Radius (in. @ 68°F)	Weight (lbs./ft.)
T720AA200	2	51	2.56	65	150	30	6	0.97
T720AA300	3	76	3.54	90	150	27	9	1.54
T720AA400	4	102	4.57	116	150	27	12	2.15
T720AA500	5	127	5.63	143	75	24	20	3.20
T720AA600	6	152	6.61	168	75	24	24	4.01
T720AA800	8	203	8.70	221	75	21	32	6.05

### COUPLING SUGGESTIONS

Quick-Acting, pin lug, short shank couplings or combination nipples attached with single bolt, double bolt, wire or band type clamps.

★ Kuriyama offers a full line of Quick-Acting couplings, pin lug shank couplings and combination nipples. Refer to current Kuriyama-Couplings™ and Accessories Catalog for type and pricing.

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS OR DISCONTINUE PRODUCTS WITHOUT PRIOR NOTICE.