


VENTILATION

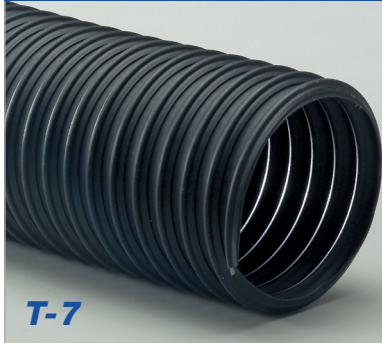

T-7

Construction: Medium weight thermoplastic rubber hose reinforced with a spring steel wire helix

Temperature Range (°F): -60° to 275°

Standard Color: Black

Size Range: 1.5" to 24"

Standard Length: 25', 50'; 14" & above in 25' only

- Good abrasion resistance
- Designed for applications with wide temperature ranges
- Great moisture & UV resistance
- Excellent chemical resistance
- Smooth interior assures minimal friction loss and efficient air flow
- Wall Thickness = .030"
- Available in metric sizes, consult sales team on pricing and minimums
- Available with factory-installed 2" black soft cuffs

PLASTIC PELLET TRANSFER



FlexStat

Construction: Specially formulated static dissipative polyurethane hose reinforced with a rigid ABS helix and an embedded copper grounding wire.

Temperature Range (°F): -40° to 200°


Standard Color: Clear with Black Helix

Size Range: 1" to 8"

Standard Length: 25', 50'

- Extremely flexible with great abrasion resistance vs. heavy walled PVC
- Smooth interior assures minimal friction loss
- Enclosed copper grounding wire reduces static build-up in material handling applications
- Permanent and non-humidity dependent ESD (electrostatic discharge) protection
- Surface Resistivity Level: 10⁸-10¹⁰ Ohms/Square
- Ideal for plastic pellet and powder transfer
- Manufactured with FDA acceptable materials
- Wall Thickness = .040"
- Static conductive cuffs available

HIGH TEMPERATURE EXHAUST

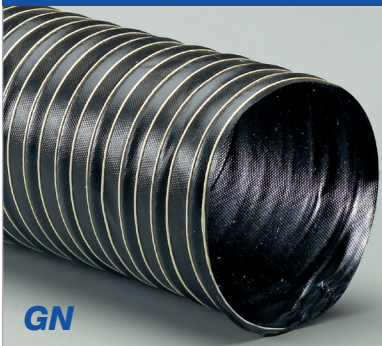

GN

Construction: Double-ply neoprene coated fiberglass fabric hose reinforced with a spring steel wire helix & external filament fiberglass cord.

Temperature Range (°F): -40° to 300°

Standard Color: Black

Standard Range: 1" to 12"

Standard Length: 12 Feet

- Offers higher temperature characteristics than traditional neoprene hoses
- The narrow pitch allows for tight bending radius while maintaining a smooth air flow
- Non-kinking
- Not recommended for continuous flexing
- Flame retardant to UL 94V-0

HIGHER TEMPERATURE EXHAUST



GS

Construction: Double-ply silicone coated fiberglass fabric hose reinforced with a spring steel wire helix & external filament fiberglass cord.

Temperature Range (°F): -65° to 550°; intermittent to 600°

Standard Color: Iron Oxide Red

Size Range: .75" to 12"

Standard Length: 12 Feet

- Suited for high temperature air handling applications
- The narrow pitch allows for tight bending radius while maintaining a smooth air flow
- Ideal for plastic processing applications
- Non-kinking
- Resistant to many oils & solvents, ozone, water, fungus & alkalis
- Not recommended for continuous flexing