


HiTemp EPDM Superflex Water Hose

High Temperature EPDM Superflex Industrial Rubber Water Hose

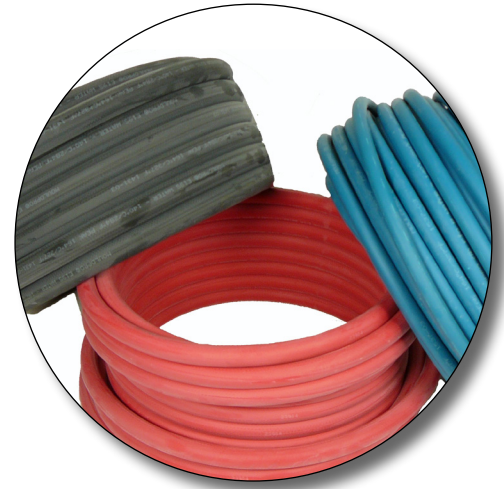

Features

- Ideal for **high temperature water lines** for molds
- Maximum operating temperature **up to +250°F**
- Maximum operating pressure is **215 PSI / 15 BAR**
- **Flexible EPDM cover** resists abrasion, ozone, heat and weather
- **Cover design prevents blistering and bubbling**
- **Synthetic textile yarn reinforcement**
- Available in **3/8"**, **1/2"** and **3/4"** IDs and colors **red, blue and black**
- **In stock** for fast delivery
- This hose is **not compatible** with push-lock fittings (**SEE PAGE 3 FOR FITTINGS**)
 - **Recommended Fittings:** Oetiker 2-Ear Crimp Clamps and Quick Connect Mold Fittings with standard hose barbs
 - **Optional Fittings & Crimper:** Ferrules and Hose Hand Crimper (required to attach ferrules)

Description

Cut costs and decrease downtime in high-temperature water applications, such as mold temperature control, with Plastixs HiTemp EPDM Superflex Industrial Rubber Water Hoses and say goodbye to cracked and hardened hoses. Hose constructed of a smooth antistatic EPDM Nitrosamine-free rubber compound and reinforced with synthetic textile yarns. Available in blue, red or black, the cover is designed to prevent blistering and bubbling and is resistant to abrasion, ozone, heat, and weather. Accessories include ferrules, hose hand crimper, Oetiker crimp clamps, and straight jaw pincer tool for Oetiker-style crimp clamps.

Purchase [HiTemp EPDM Hose & Accessories](#) online.
For more information email sales@plastixs.com



HiTemp EPDM Superflex Water Hose

High Temperature EPDM Superflex Industrial Rubber Water Hose



Specifications

Cover: Blue, red or black smooth EPDM Nitrosamine-free rubber compound

Reinforcement: Synthetic textile yarns

Tube: Black antistatic smooth EPDM Nitrosamine-free rubber compound

Maximum Operating Temperature: Up to +250° F

Maximum Operating Pressure: 215 PSI / 15 BAR

Standard Lengths: 50 meters (164-foot roll for 3/8" and 1/2" IDs), 30 meters (98-foot roll for 3/4" ID)

Fittings: This hose is not compatible with push-lock fittings (**SEE PAGE 3 FOR FITTINGS**)

- **Recommended Fittings:** Oetiker 2-Ear Crimp Clamps and Quick Connect Mold Fittings with standard hose barbs
- **Optional Fittings & Crimper:** Ferrules and Hose Hand Crimper (required to attach ferrules)

Item Number	Hose ID	Color	Working Pressure PSI / BAR	Roll Length
PLX-HT10Bx50m	3/8"	Blue	215 / 15	50 meters (164 feet)
PLX-HT10Rx50m	3/8"	Red	215 / 15	50 meters (164 feet)
TFW10Sx50m	3/8"	Black	215 / 15	50 meters (164 feet)
PLX-HT13Bx50m	1/2"	Blue	215 / 15	50 meters (164 feet)
PLX-HT13Rx50m	1/2"	Red	215 / 15	50 meters (164 feet)
TFW13Sx50m	1/2"	Black	215 / 15	50 meters (164 feet)
PLX-HT19Bx30m	3/4"	Blue	215 / 15	30 meters (98 feet)
PLX-HT19Rx30m	3/4"	Red	215 / 15	30 meters (98 feet)
TFW19Sx30m	3/4"	Black	215 / 15	30 meters (98 feet)

Purchase [HiTemp EPDM Hose & Accessories](#) online.


For more information email sales@plastixs.com

For quick connect applications, we recommend Plastixs [Quick Connect Mold Couplers](#) and [Mouldpro Quick Connect TS Safety Couplings](#).



HiTemp EPDM Superflex Water Hose

High Temperature EPDM Superflex Industrial Water Hose

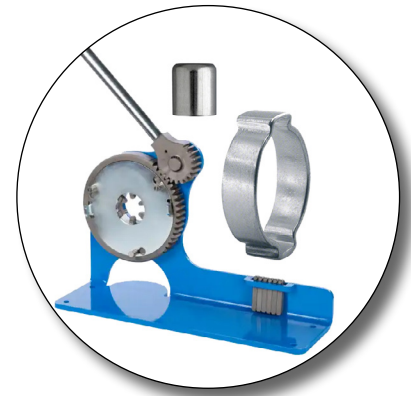

FITTINGS


Fittings: This hose is not compatible with push-lock fittings

- **Recommended Fittings:** Oetiker 2-Ear Crimp Clamps and Quick Connect Mold Fittings with standard hose barbs
- **Optional Fittings & Crimper:** Ferrules and Hose Hand Crimper (required to attach ferrules)

Item Number	Description	EPDM Hose ID	Notes
EC1518	Oetiker Crimp Clamp	3/8"	Suitable for PLX-HT10 3/8" ID EPDM Hose
EC2023	Oetiker Crimp Clamp	1/2"	Suitable for PLX-HT13 1/2" ID EPDM Hose
EC2731	Oetiker Crimp Clamp	3/4"	Suitable for PLX-HT19 3/4" ID EPDM Hose
PLX-001981	Straight Jaw Pincer Tool	N/A	Required to attach Oetiker-Style Crimp Clamps
TFK1710	Ferrule	3/8"	Suitable for PLX-HT10 3/8" ID EPDM Hose
TFK2313	Ferrule	1/2"	Suitable for PLX-HT13 1/2" ID EPDM Hose
TFK2919	Ferrule	3/4"	Suitable for PLX-HT19 3/4" ID EPDM Hose
TFP100	Hose Hand Crimper	N/A	Required to attach ferrules

Purchase [HiTemp EPDM Hose & Accessories](#) online.

For more information email sales@plastixs.com

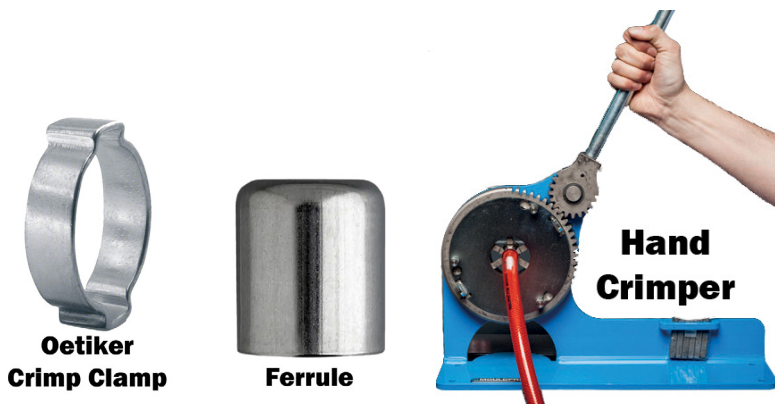

For quick connect applications, we recommend Plastixs [Quick Connect Mold Couplers](#) and [Mouldpro Quick Connect TS Safety Couplings](#).

