


# TECHNICAL DATA SHEET

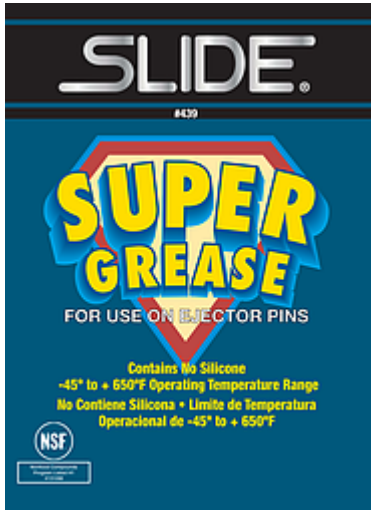

## Super Grease Non-Aerosol 43900-01, 43900-03, 43900T, 43900-7, 43900-35, 43900-400

### Product Description

Super Grease will not separate, run or fall out and has exceptional load-bearing properties. Thixotropic properties provide excellent mechanical stability when sudden temperature changes occur. A clear, clean, non-yellowing grease, Super Grease is ideal for injection molds, mold assemblies, and especially medical and food grade plastic parts. It also repels water and prevents corrosion.

### Applications

Ejector Pin Lubricant

### Unit Package Description

Multiple sizes

### Generic Description

Ejector Pin Grease

### Net Weight Fill

multiple sizes

### UPC Code

858799000752

### Appearance

Colorless Grease

### Odor

None

### Flash Point F

455 degrees

### Flash Point C

235 degrees

### Base Type

PTFE

### Evaporation Rate

N/A

### HMIS Rating

0, 1, 0 , None Determined

### DOT Proper Shipping Name

Not Regulated, Lubricating, NOI

### Removal

Remove with organic or hydrocarbon solvents

### Food Safety Citation (CFR)

NSF H1

### Units Per Case

multiple sizes

### Working Temperature F

-45 to 650 degrees

### Working Temperature C

-43 to 343 degrees

### Propellant

N/A

### NFPA Aerosol Flammability Level

N/A

### Independent Certifications

NSF category H1