



Capacitive Sensors
Series 70 - NPN
Series 80 - PNP










- Housing M 32 x 1.5
- Housing material: PA / PPO
 - Sensing distance 2...30 mm adjustable

Certificate:



Technical data

	Non-flush mountable
Operating distance S_n	20 mm
Operating distance min. / max. adjustable	2...30 mm
Electrical version	4-wire DC
Output	Antivalent
Type NPN	
Art.-No.	
Connection diagram No..	
Type PNP	
KAS-80-35-A-M32-NL	
Art.-No.	
KA 0440	
Connection diagram No.	
6	
Operating voltage (U_B)	12...30 V DC
Output current max. (I_o)	2 x 200 mA
Voltage drop max. (U_d)	≤ 2.0 V
Permitted residual ripple max.	5 %
No-load current (I_o)	< 15 mA
Frequency of operating cycles max.	50 Hz
Permitted ambient temperature	-25...+70 °C
LED-display	Yellow
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2
Connection	2 m, PVC, 4 x 0.5 mm ²
Housing material	PA / PPO
Active surface	PA / PPO
Lid	PA / PPO

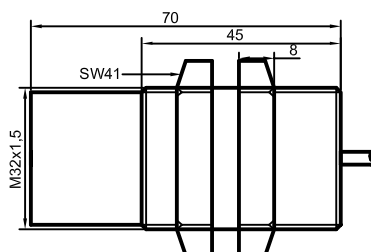

Made in Canada