



“Cover Guard”

CG™ Series

PVC Ducting Cover Protection Hose

GENERAL APPLICATIONS

- Cable and hose bundle protection (MSHA)
- Dust collection
- Ducting, ventilation and fume removal
- Mine supply line cover protection

CONSTRUCTION

PVC tube with rigid PVC helix

SERVICE TEMPERATURE RANGE

-4°F (-20°C) to +150°F (+65°C)*

*Actual service temperature range is application dependent.



FEATURES AND ADVANTAGES

- **MSHA (08) Approved** – Meets U.S. Dept. of Labor Administration requirements for flame-resistance for use in mines for protection of hose bundles. Optional, special order, red or green colored helix also approved.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.
- **CG-SL Series** – pre-slit for easy insertion of hose bundles.

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius (in) at 68°F	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	at 68°F	at 104°F	at 68°F	at 104°F			
CG200	2	50.8	2.30	58.4	12	6	10	5	2	100	0.28
CG238	2 3/8	60.3	2.76	70.1	12	6	10	5	2	100	0.38
CG250	2 1/2	63.5	2.81	71.3	10	5	8	4	2	100	0.39
CG300	3	76.2	3.35	85.0	8	4	7	3	3	100	0.45
CG350	3 1/2	88.9	3.83	97.4	8	4	7	3	3	100	0.51
CG400	4	102.4	4.39	111.4	6	3	6	3	3	100	0.64


NOTES:

- Service life may vary depending on operating conditions and type of material being conveyed.

COMPLIANCES (for details see page 87)

MSHA (08), Phthalate Free (10), RoHS (11)

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

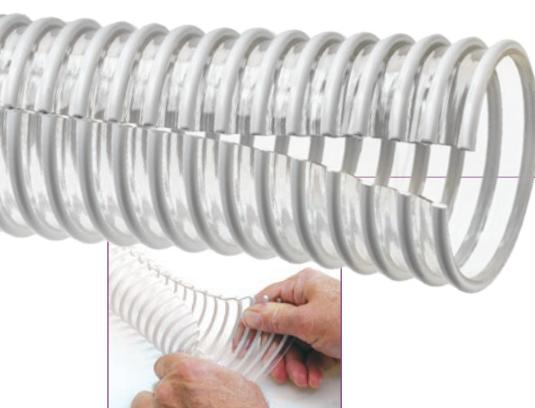

“Cover Guard Slit” CG-SL™ Series

Pre-slit PVC Protection Cover Hose

GENERAL APPLICATIONS

- Cable and hose bundle protection (MSHA)
- Mine supply line cover protection

CONSTRUCTION

PVC tube with rigid PVC helix (pre-slit)

SERVICE TEMPERATURE RANGE

-4°F (-20°C) to +150°F (+65°C)*

*Actual service temperature range is application dependent.



FEATURES AND ADVANTAGES

- **MSHA (08) Approved** – Meets U.S. Dept. of Labor Administration requirements for flame-resistance for use in mines for protection of hose bundles. Optional, special order, red or green colored helix also approved.

- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces. Easy-to-handle.
- **Pre-Slit** – Allows for easy insertion of hose bundles.

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Standard Length (ft)	Weight (lbs/ft)
CG-SL100	1	25.4	1.28	31.9	100	0.14
CG-SL125	1 1/4	31.8	1.51	38.4	100	0.18
CG-SL150	1 1/2	38.1	1.76	45.1	100	0.21
CG-SL200	2	50.8	2.30	58.4	100	0.28
CG-SL250	2 1/2	63.5	2.81	71.3	100	0.39
CG-SL300	3	76.2	3.35	85.0	100	0.45
CG-SL350	3 1/2	88.9	3.83	97.4	100	0.51
CG-SL400	4	102.4	4.39	111.4	100	0.64

NOTES:

- Service life may vary depending on operating conditions and type of material being conveyed.

COMPLIANCES (for details see page 87)

MSHA (08), Phthalate Free (10), RoHS (11)

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

