



Quickon II Couplers

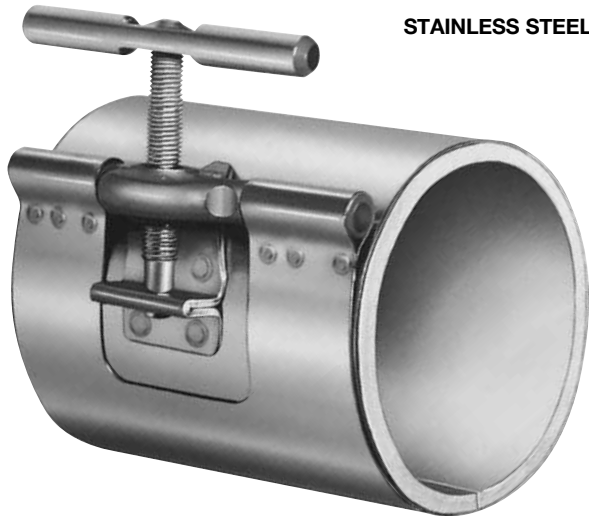

STAINLESS STEEL

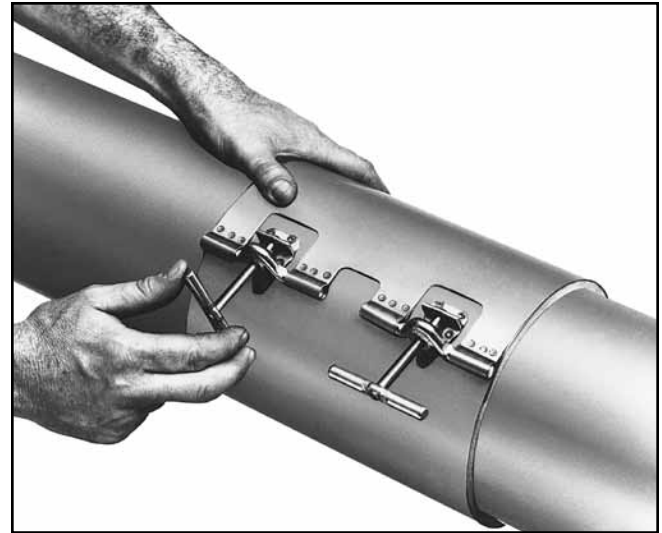

FOR PNEUMATIC OR VACUUM CONVEYING SYSTEMS

Morris Quickon II Couplers can be installed or removed with a twist of the wrist. No tools or special skills needed. The positive-locking system turns easily to seal or to compensate for normal O.D. pipe or tubing tolerances.

This in-line Coupler is ideal for use where fast takedown and reassembly of lines is essential; reduced coupler weight is desirable; a line or system is frequently modified or wrap-around installation is necessary.

QUICKON II COUPLER

O.D. Size (in.)	Code No.	Wt. (lbs.)	Food-Grade Gum Gasket	
			PIC No.	
1.500	1501	.58	2401501G2	
1.660	1661	.60	2401661G2	
1.750	1751	.62	2401751G2	
1.900	1901	.65	2401901G2	
2.000	2001	.68	2402001G2FG	
2.125	2121	.70	2402121G2	
2.250	2251	.71	2402251G2	
2.375	2371	.74	2402371G2	
2.500	2501	.77	2402501G2FG	
2.750	2751	.80	2402751G2	
2.875	2871	.84	2402871G2	
3.000	3001	.88	2403001G2FG	
3.250	3251	.97	2403251G2	
3.500	3501	1.06	2403501G2FG	
3.750	3751	1.15	2403751G2	
4.000	4001	1.25	2404001G2FG	
4.250	4251	1.32	2404251G2	
4.500	4501	1.40	2404501G2FG	
5.000	5001	1.55	2405001G2FG	
5.563	5561	1.63	2405561G2	
6.000	6001	1.72	2406001G2FG	
6.250	6251	1.78	2406251G2	
6.625	6621	1.82	2406621G2	
8.000	8001	2.25	2408001G2FG	
8.625	8621	2.38	2408621G2	
9.000	9001	2.45	2409001G2	
10.000	10001	2.65	2410001G2	

STANDARD QUICKON II COUPLERS LISTED ARE 4" IN LENGTH.

DUAL QUICKON II COUPLER

O.D. Size (in.)	Code No.	Food-Grade Gum Gasket	
		PIC No.	
4.000	2-4001	2804002G2	
4.500	2-4501	2804502G2	
5.000	2-5001	2805002G2	
6.000	2-6001	2806002G2	
6.625	2-6621	2806622G2	
8.000	2-8001	2808002G2	
8.625	2-8621	2808622G2	
10.000	2-10001	2810002G2	
10.750	2-10751	2810752G2	
12.000	2-12001	2812002G2	
12.750	2-12751	2812752G2	

DUAL QUICKON II COUPLERS LISTED ARE 9-1/2" IN LENGTH.

Specifications

All stainless-steel construction including band, strike plate, handle screw and yoke. Gasket is abrasion-resistant, gum rubber attached to band. Static-conducting grounding strip included on request.

Order by O.D. Size, Code No., and Gasket.

Prices subject to change without notice.